

Evolutionary Mesh Numbering: Preliminary Results

Francis Sourd and Marc Schoenauer

CMAP – URA CNRS 756
Ecole Polytechnique
Palaiseau 91128, France
`marc.schoenauer@polytechnique.fr`

in I. Parmee, ed., Proceedings of ACDM'98, pp 137–150, Springer Verlag, 1998

Abstract. Mesh numbering is a critical issue in Finite Element Methods, as the computational cost of one analysis is highly dependent on the order of the nodes of the mesh. This paper presents some preliminary investigations on the problem of mesh numbering using Evolutionary Algorithms. Three conclusions can be drawn from these experiments. First, the results of the up-to-date method used in all FEM softwares (Gibb's method) can be consistently improved; second, none of the crossover operators tried so far (either general or problem specific) proved useful; third, though the general tendency in Evolutionary Computation seems to be the hybridization with other methods (deterministic or heuristic), none of the presented attempt did encounter any success yet. The good news, however, is that this algorithm allows an improvement over the standard heuristic method between 12% and 20% for both the 1545 and 5453-nodes meshes used as test-bed. Finally, some strange interaction between the selection scheme and the use of problem specific mutation operator was observed, which appeals for further investigation.

1 Introduction

Most Design Problems in engineering make an intensive use of numerical simulations of some physical process in order to predict the actual behavior of the target part. When the mathematical model supporting the numerical simulation involves Partial Differential Equations, Finite Element Methods (FEM) are today one of the most widely used method by engineers to actually obtain an approximate numerical solution to their theoretical model. However, the computational cost of up-to-date numerical methods used in FEM directly depends on the way the nodes of the underlying mesh (i.e. the discretization) are numbered. Solving the Mesh Numbering Problem (MNP) amounts to find the permutation of the order of the nodes that minimizes that computational cost.

Numerical engineers have developed a powerful heuristic technique (the so-called *Gibb's method*) that gives reasonably good results, thus providing a clear reference to any a new mesh numbering algorithm.

The goal of this paper is to use Evolutionary Algorithms (EAs) to tackle the MNP. EAs have been widely applied to other combinatorial optimization problems, among which the popular TSP [10,4]. However, as far as we know, this is the first attempt to solve the MNP using EAs. Unfortunately, though both problem look for a solution in the space of permutations of $[0, n]$, the specificity of the MNP might make inefficient the simple transposition of TSP techniques to the MNP. Indeed, looking at the history of Evolutionary TSP, it seems clear that the key of success is hybridization with problem-specific techniques: from the Grefenstette’s early incorporation of domain knowledge [10] to the most recent works [4,12,6] where evolutionary results can – at last – be compared to the best Operational Research results, even for large size TSP instances. So the path to follow here seems rather clear: design some MNP-specific operators, and compare their performances to either “blind” problem independent operators or TSP-specific operators.

The paper is organized as follows: Section 2 recalls the basics of Finite Element Methods, and precisely defines the objective function. The state-of-the-art “Gibbs method” is also briefly described. Section 3 presents the design of the particular Evolutionary Algorithm used thereafter, discussing in turn the representation issue, specific crossover and mutation operators, and the initialization procedure. This algorithm is then experimented in section 4, with emphasis on the tuning of the probabilities of application of all operators at hand (both problem-specific and problem independent). First, the crossover operators all rapidly appear harmful. Second, surprising interactions between the selection scheme and the different mutation operators seem to indicate that, though at the moment domain knowledge did not increase the performances of the algorithm, there is still some room for improvement in that direction. Finally, the usefulness of evolutionary mesh numbering with respect to Gibbs’ method is discussed: the results are indeed better, but the cost is also several orders of magnitude greater.

2 Mesh Numbering

2.1 Theoretical Background

Many models for physical, mechanical, chemical and biological phenomenon end up in Partial Differential Equations (PDE) where the unknown are functions defined on some domain Ω of $\mathbb{R}^n$.

A popular way to transform a system of PDEs into a finite linear system is the Finite Element Method (FEM) [18,3]. The domain Ω is discretized into small *elements*, who build up a *mesh*. A typical mesh – on a non-typical domain – is given in Figure 1. The solution of the initial PDEs is sought in spaces of functions that are polynomial on each element. Such an approximate solution is completely determined by its values at some points of each element, called the *nodes* of the mesh. Those values are computed by writing the original PDEs locally on each element, resulting in a linear system of size the number of nodes times the number of *degrees of freedom*, or unknown values, at each node). Usual sizes

for such systems range from a few hundreds (e.g. in two-dimensional structural mechanics) to millions (e.g. for three-dimensional problems in aerodynamics).

However, as a consequence of the local discretization, the equation at each node only involves values at a few neighboring nodes: the resulting matrix is hence very sparse. And specific methods exist for sparse system [9], whose complexity is proportional to the square of the *bandwidth* of the matrix, i.e. the average size of the *profile* of the matrix, given by the sum over all lines of the maximal distance to the diagonal of non-zero terms. For full matrices, the bandwidth is $n(n-1)/2$ while it is n for tridiagonal matrices (for $n \times n$ matrices).

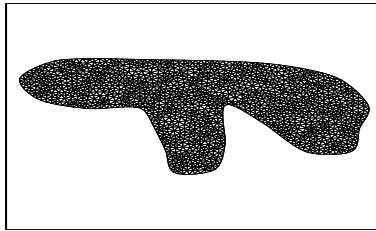


Fig. 1. *Sample mesh with 1545 nodes.*

2.2 Computing the bandwidth

The contribution of each single line to the total bandwidth of the matrix is highly dependent on the order of the nodes of the mesh: the equation for node number i only involves the neighboring nodes; hence the only non-zero terms of the corresponding equation will appear in the matrix in the column equal to the number of the node in the mesh. Depending on the order of the nodes in the mesh, the bandwidth can range from a few units to almost the size of the matrix.

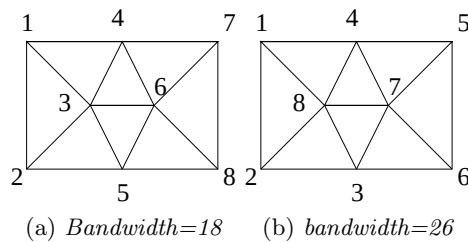


Fig. 2. *A simple example of bandwidth with respect to nodes order.*

A simple example of a mesh is given in Figure 2 for a two-dimensional domain discretized into triangles. The nodes of that mesh are the summits of the

triangles (note that, while common, this situation is not the rule, and the middle of the edges, the center of gravity of the triangles, $\dots$ can also be nodes). The effect of numbering is demonstrated in Figures 2-a and 2-b, where the same mesh can give a bandwidth of 18 or 26, depending on the order in which the nodes are considered.

The only useful data for mesh numbering is, for each node, the list of all neighbors. For instance, the mesh of Figure 2-a can hence be viewed as
 (2 3 4) (1 3 5) (1 2 4 5 6) (1 3 6 7) (2 3 6 8) (3 4 5 7 8) (4 6 8) (5 6 7)

Once an order for the nodes is chosen, the profile of the matrix can be constructed: an upper bound ¹ of the fitness function is given by the following equation (1), where N is the number of nodes, and, for each i in $[1, N]$, $\mathcal{N}(i)$ is the set of neighbors of node i :

$$\mathcal{B} = \sum_{i=1}^{i=N} \min_{(j>i); (j \in \mathcal{N}(i))} (j - i) \quad (1)$$

Note that due to symmetry, only the contribution to the bandwidth of the upper part of the matrix is considered.

For the simple case of the mesh of figure 2, the bandwidth is $3 + 3 + 3 + 3 + 3 + 2 + 1 = 18$ for the order (a) and $7 + 6 + 5 + 4 + 2 + 1 + 1 = 26$ for the order (b).

The goal of mesh renumbering is to find the order of the nodes (i.e. a permutation on $[1, N]$) that minimizes the bandwidth $\mathcal{B}$.

2.3 State of the art

The problem of mesh numbering is clearly a *NP-complete* combinatorial problem, as the search space is the space of permutations in $[1, n]$. Hence, no exact deterministic method can be hoped for. Numerical scientists have paid much attention to that problem, developing heuristic methods. The favorite method nowadays, used in most FEM software packages, is the so-called *Gibbs method* presented in detail in [5]). It performs three successive steps, and use the graph G representing the “neighbor to” relationship between nodes.

- Find both ends of the numbering. They are chosen such that, first, their distance (in term of minimal path in G joining them) is maximal, and second, each one has the lowest possible number of neighbors.
- Make a partition of graph G into layers containing nodes at the same distance from the origins.
- Number the nodes breadth-first, starting from one origin (i.e. numbering nodes layer by layer).

¹ Some of these candidates to be non-zero can actually be null, depending on the actual formulation of the PDEs. But this rare eventuality will not be considered in the general framework developed here.

As Gibbs method is used in all FEM packages, the minimum requirement for any other algorithm to be considered interesting by numerical scientists is to obtain better results than those of Gibbs. Hence, in the following, all results of performance will be given relatively to those of Gibbs.

3 The evolutionary algorithm

3.1 MNP is not a TSP

Combinatorial optimization is a domain where evolutionary algorithms have encountered some successes, when compared to state-of-the-art heuristic methods. Probably the most studied combinatorial optimization problem is the Traveling Salesman Problem (TSP). In both cases (MNP and TSP), the search space is that of all permutations of N elements.

However, a first obvious difference is that both the starting point and the “direction” of numbering are discriminant in the MNP while they are not in the TSP. As a consequence, the size of the search space in the MNP is $n!$ while it is $(n-1)!/2$ for the TSP. On the other hand, no *degeneracy* (see [14]) is present in the *permutation* representation for the MNP (see below).

Second, the MNP is not so easily *decomposable*. A whole part of a solution of the TSP can be modified without modifying the remaining of the tour. In the MNP on the other hand, the propagation of any modification has consequences on all geometrical neighbors of all modified nodes.

As a consequence, the useful notion of “neighbor” is totally different from one problem to another: In the TSP, two towns are usually called neighbors if they are visited one after the other on the tour at hand; In the MNP, the “neighbor of” relationship is absolute geometrical data, independent of any order.

Practically, a major difference between both problems is the absence of any local well known optimization algorithm for the MNP: as quoted in the introduction, the best results obtained so far by evolutionary algorithms on the TSP are due to hybrid “memetic” algorithms searching the space of local optima with respect to a local optimization procedures (e.g. the 2-opt or 4-opt procedures in [4,12,6]). Such strategy cannot be reproduced for the MNP.

3.2 Representation

One important consequence of these differences is that the concepts of “edges” or “corners” [14], known to be of utter importance for the TSP, do not play any role in the MNP.

Two representations will be experimented with in that paper:

- In the *permutation* representation, a permutation is represented by the sequential list of the numbers of all nodes. Note that this representation relies on a predefined order of the nodes (corresponding to the identity permutation $(1, 2, 3, \dots, N)$). Some consequences are discussed in section 3.5.

- All permutations can be decomposed in a sequence of transpositions. Moreover, all sequences of transpositions make a unique valid permutation. The *transposition* representation describes a permutation as an ordered list of transpositions. Note that this representation is highly degenerate: many genotypes correspond to the same phenotype.

3.3 Crossover operators

Four crossover operators have been tested, from general-purpose operators to MNP-specific crossovers.

- The transposition crossover is a straightforward crossover for the transposition representation: It exchanges portions of the transposition lists of both parents. As any combination of transpositions make a valid permutation, it directly generates valid permutations.
- The *edge crossover* is a general-purpose operator for permutation problems, designed and tested on the TSP problem [17]. No specific knowledge about the problem is used, but the underlying assumption is that edges are the important features in the permutations. All experiments using the edge crossover gave lousy results, thus confirming that edges do not play for the MNP the important role they have in the TSP. That crossover will not be mentioned any more here.
- The *breadth-first* crossover is based on the heuristic technique described in section 2.3, but uses additional information from both parents to generate one offspring.

A starting point is randomly chosen, is given the number it has in parent A , and becomes the current node. All neighbors of the current node are numbered in turn, being awarded an unoccupied number, before being put in a FIFO stack. To number the neighbor N of a node M already numbered i_M , the differences Δ_A and Δ_B of the numbers of nodes M and N respectively in parent A and parent B are computed. If the number $i_M + \min(\Delta_A, \Delta_B)$ is free, it is given to node N . Otherwise, if the number $i_M + \max(\Delta_A, \Delta_B)$ is free, it is given to node N . Otherwise, the number closest to i_M which is not yet used is given to node N .

All nodes are processed once, and are given a yet-unattributed number, generating a valid permutation. This crossover tries as much as possible to reproduce around each node the best local numbering among those of both parents.

- The *difference* crossover was designed to both preserve the diversity in the population and try to locally minimize the fitness function. From both permutation representations of the parents, all nodes having the same number are given that common number in the offspring permutation. Further, all remaining nodes in turn (in a random order) are given the number which is the closest possible from all its neighbors numbers.

3.4 Mutation operators

Here again, both general-purpose and problem specific mutation operators were tested.

- The minimal mutation for the permutation representation is the exchange of numbers between two randomly chosen nodes (i.e. the application of a transposition), thereafter termed *transposition mutation*. Its strength can be adjusted by repeated application during the same mutation operation.
- The *neighbor transposition mutation* is a slight modification of the above operator: after the first node has been chosen randomly, it is exchanged with one of its neighbors.
- The *neighbor permutation mutation* is a further step in the direction of using neighbor information to perform mutation: a node is randomly chosen, and a random permutation among the numbers of all its neighbors is performed.
- The *inversion mutation* reverts some part of the permutation. A special case of the inversion mutation is when the whole permutation is inverted. This operator was found useful in Gibbs method (section 2.3).
- The choice of the origin of the numbering is important in the MNP. The *origin mutation* was designed to handle this issue. An integer i is randomly chosen, and all numbers j are replaced by either $i + j \bmod n$ either $n - (i + j) \bmod n$, on a local minimization argument (the brute translation only gives birth to usually very bad numbering when the old origins met).

3.5 Initialization procedure

The standard way to initialize a population is to perform a uniform sampling of the genotype space. However, alternative specific ways have been proposed: for instance, the greedy heuristic for the TSP (from a random initial town, chose the nearest town not yet visited) constructs individuals with a tour length of about 20% more than the optimal value on average [4]. In the same line, three different initialization procedures have been tested for the MNP.

- The standard uniform sampling of the standard representation (section 3.2) was the first obvious choice. It is termed *random initialization*.
- As the state-of-the-art solution is given by the output of the Gibbs method (section 2.3), the *Gibbs initialization* performs only slight perturbations of the Gibbs solution to generate the initial permutations. This is achieved using the transposition representation (section 3.2) taking the Gibbs order as reference, and allowing only a small number of transpositions. Note that in this case, the original Gibbs result is included as the first individual of the population.
- The trouble with the above Gibbs initialization is a very strong bias toward solution quite similar to Gibbs. If higher optima are located in very different regions of the permutation space, they will probably not be found. To address that issue, the *point initialization* was designed, based on some breadth-first heuristic similar to Gibbs', but using a random starting point (Gibbs process is very sensitive to the choice of the initial point).

The average bandwidth of permutation drawn using the uniform initialization is of course quite large (more than 6 times that of Gibbs method). The point initialization gives much better individuals: their bandwidth range from 20% to 100% above Gibbs results while Gibbs initialization stays between 0% and 15% above Gibbs order.

4 Experimental Results

4.1 The meshes

Three meshes have been used to test the algorithm described above: the *small* mesh has 164 nodes, the *medium* one has 1544 nodes (see Figure 1) and the *large* mesh has 5453 nodes. The computational cost of one fitness function evaluation increases linearly with the size of the mesh. Hence, most initial experiments were performed in the *small* mesh. The validation of clear tendencies was then carried on for confirmation on the *medium* mesh. The best combination of parameters were finally tested on the *large* mesh, as its size is becoming to be of some interest for real world application.

4.2 Experimental settings

Two basic evolution schemes were used: a standard GA, with linear ranking and elitist generational replacement; a $(\mu+\lambda)$ -ES scheme, in which all μ parents give birth to λ offspring, the best μ of the $\mu + \lambda$ parents + offspring becoming the parents of the next generation. The first series of experiments were performed on the *small* mesh, using a population sizes of 50 for the GA scheme, and a (7+50)-ES. Both schemes were tested with the same combinations of P_c - P_m , (crossover rate - mutation rate). If an individual undergoes crossover, a mate is selected and only one offspring is generated. One single type of crossover was made possible at each run. The resulting offspring (or the initial individual if no crossover occurred) then undergoes mutation with probability P_m . If mutation happens, one mutation operator is chosen according to user-defined weights, and, in the case of transposition mutations, one single transposition is performed.

4.3 First tuning on the small mesh

As said above, intensive experiments were performed on the small mesh. During those experiments, all values for P_c and P_m between 0 and 1 by 0.1 steps were tried independently, for all possible crossover operators. Those runs were allowed 150000 fitness evaluations (unless otherwise mentioned).

Preliminary runs were performed to tune the mutation weights ([16]). The weights for the 5 mutations were first set equal. Then a close look at the types of mutations that the best individual in the population was submitted to, along different runs, allowed to eliminate both the *inversion mutation* and the *origin*

mutation. Only the *random transposition mutation*, the *neighbor transposition mutation* and the *neighbor permutation mutation* proved useful, and their weights $PmRand$, $PmNeighbor$ and $PmAround$ were set to values between 0 and 1, their sum being equal to 1.

Initialization procedures As could be predicted, the best on-line results were obtained for the *Gibb's initialization*, as its starting point was rather better than both other. But whereas the *point initialization* almost caught up (as will be seen in forthcoming section 4.4), the *random initialization* stayed far beyond, even when allowed ten times the number of fitness evaluations. So only the *Gibb's* and the *point* initializations will be considered in the following.

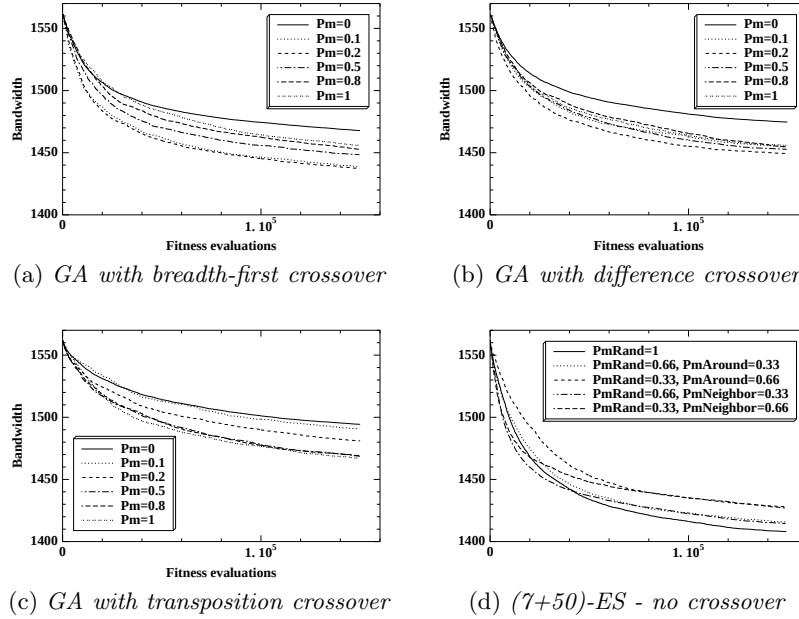


Fig. 3. Typical on-line results (averages over 21 runs) on the small mesh: for the three GA runs, population size is 50, P_c is 0.6 and P_m is as indicated; for the (7+50)-ES runs, $P_m=1$; in all cases, whenever an individual is mutated, $PmRand=0.66$ and $PmNeighbor=0.33$.

Crossover operators and evolution schemes The first experiments aimed at comparing the crossover operators, and adjusting the crossover rate P_c . A common feature could be observed for all three crossovers: when using the GA scheme, and except for high values of P_m , for which it made no significant difference, the results decreased when P_c decreased from 1 to 0.6 or 0.5. Moreover,

and almost independently of the settings of the mutation weights, the best results were obtained with the (7+50)-ES scheme, with $P_c = 0$ (higher values of P_c for the ES scheme performed rather poorly - but this might be because of the rather small population size of 7).

When it comes to compare the crossover operators, the results of Figure 3 (a), (b) and (c), are what could be expected: the “blind” *transposition crossover* (c) performs rather poorly – and gets its best results for the highest values of P_m which seems to indicate that it is really not helping much. On the opposite, both other operators, that do incorporate some domain knowledge, get their highest performances for $P_m = 0.2$ and $P_m = 0.1$. Moreover, the *breadth-first crossover* (a) performs better than the *difference crossover* (b) (and the difference is statistically significant with 99% confidence T-test after 300000 fitness computations).

A last argument favoring the abandon of crossover operators is the extra cost they require, as based on local optimization heuristics of complexity $o(N)$. For instance the total CPU time is increased by a factor around 4 between runs with $P_c = 0$ and $P_c = 1$ (from 3 to 13mn on average for 300000 evaluation runs on a Pentium P200).

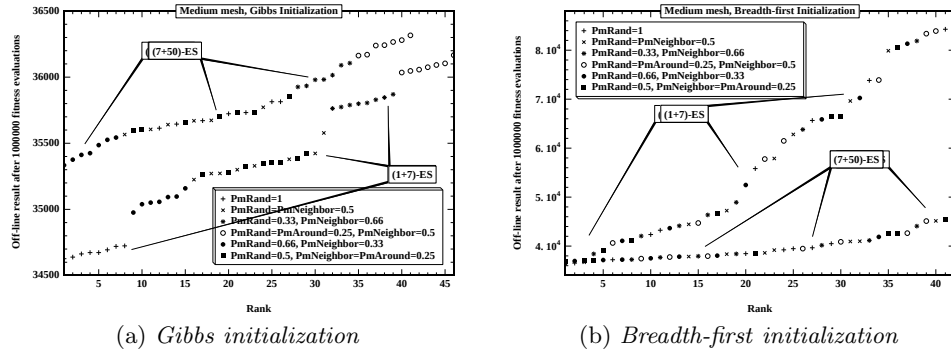


Fig. 4. Off-line results of both (7+50)-ES and (1+7)-ES after 1000000 fitness evaluations, for different settings of the mutation weights.

4.4 Mutations and population size

This section presents some results obtained on the *medium* and *large* meshes, using mutation operators only inside some *ES* evolution scheme. At first, the goal of these experiments was to sort out the usefulness of problem-specific knowledge, in the initialization procedure and in the mutations operators. But it rapidly turned out that the population size also was a very important parameter.

Figure 4 witnesses the surprising results obtained on the medium mesh: each dot indicates the best fitness reached after 1 million fitness evaluations of a single run of the evolutionary algorithm. The different shapes of the dots represent different settings of the relative mutation rates $PmRand$, $PmNeighbor$ and

PmAround. Figure 4-a shows the runs that used the Gibbs initialization procedure while Figure 4-b those who used the breadth-first initialization procedure. On each Figure, the two distinct sets of points correspond to the $(1 + 7)$ - and the $(7 + 50)$ -ES schemes, as indicated. Note that all trials with larger population sizes were unsuccessful.

Some clear conclusions can be drawn from these results. First, the overall best results are obtained for the $(1 + 7)$ -ES scheme starting from the Gibbs initialization and using the “blind” *transposition mutation* only (Figure 4-a) (see section 4.5 for a detailed comparison with the results of Gibbs method). But comparing the results between Gibbs and breadth-first initialization procedures on the one hand, and $(1 + 7)$ - and $(7 + 50)$ -ES schemes on the other hand gave some unexpected results:

- Whereas the $(1 + 7)$ -ES scheme consistently outperformed the $(7 + 50)$ -ES scheme when using Gibbs initialization, the reverse is true for the breadth-first initialization;
- Whereas different settings of the mutation rates gave rather different results for the Gibbs runs, this does not seem to be so clear for the breadth-first runs;
- whatever the initialization, the $(7 + 50)$ results are more stable than the $(1 + 7)$ results with respect to mutation rates; This is striking on the breadth-first plot, but also true on the other plot.
- the worst results are obtained for the lowest values of *PmRand* (the results with even lower values of *PmRand* are not presented here, but were very poor). However, domain specific mutation operators (see the black circles and squares, compared to the “+” dots) are more efficient with the $(7 + 50)$ scheme than with the $(1 + 7)$ scheme. This is specially visible on the Gibbs runs.

Note that these tendencies were confirmed when the runs were allowed more fitness evaluations (e.g. 10 millions, see forthcoming section 4.5).

Some tentative explanations can however be proposed, after noticing that the $(1 + 7)$ scheme can be viewed more like a *depth-first* algorithm while the $(7 + 50)$ scheme searches in a more *breadth-first* manner.

So, using Gibbs initialization probably tightens the population in a very limited area of the search space from which it is useless to try to escape: this favors the performance of depth-first search, as breadth oriented search does not have the possibility to jump to other promising regions. Moreover, it seems that the transpositions of neighbor nodes in a depth-first search does not allow large enough moves to easily escape local optima, resulting in the best results for the pure random mutation for the $(1 + 7)$.

On the other hand, successive local moves have greater chances of survival in the $(7 + 50)$ breadth search, and give the best results in that case (though some random mutation are still needed). And when it comes to a more widely spread population after the breadth-first initialization, the breadth-first search demonstrates better results by being able to use more efficiently in that case the

domain neighboring information.

This situation suggests further directions of research: First, the $(1 + 7)$ -ES scheme with pure random mutation resembles some sort of Tabu search [7,8], and so might be greatly improved by adding some memory to it, either deterministically, like in standard Tabu search, or stochastically, as proposed in [15,13].

Second, more than one neighbor transposition seems necessary to generate improvements. Hence, the number of transpositions should not be forced to 1, and can be made either self-adaptive, with the same problems than in the case of integer variables in Evolution Strategies [1], or exogenously adaptive, as proposed in [2] where some hyperbolic decreasing law is used for the mutation rate along generations.

4.5 Evolutionary mesh numbering vs Gibbs method

But apart from optimizing the evolutionary algorithm itself on the MNP, a critical point is whether evolutionary mesh numbering can compete with the Gibbs method. Of course, if the Gibbs initialization is used, as the original Gibbs numbering is included in the initial population, any improvement is in fact giving a better result than the Gibbs method. But how interesting is that improvement, especially when the computational cost is taken into account?

On the medium mesh (1545 nodes), the bandwidth using Gibbs method is 39055. As can be seen on Figure 4, the best result of the $(1 + 7)$ -ES with pure random mutation after 1 millions evaluations is 34604, i.e. an improvement of 11.4%. The computational cost of one run is 15-20mn (on a Pentium 200Mhz Linux workstation), to be compared to the 20s seconds of Gibbs method!

If the maximum number of function evaluations is set to 10 millions, the best result in the same conditions is 32905 (i.e. 15.75% improvement), with an average over 21 runs of 33152 (15.11%). Of course, in that latter case, the computational cost is 10 times larger ...

The results on the large mesh (5453 nodes) follow the same lines, though only the combinations of parameters found optimal on the medium mesh were experimented with, due to the computational cost (around 12-14 hours for 10 Millions evaluations).

From a Gibbs bandwidth of 287925 (obtained in about one minute), the best result for the $(1 + 7)$ -ES with only random mutation was 257623 (10.52%) while the average of 6 runs was 258113 (10.35%). On the other hand, the best for $(7 + 50)$ -ES was 262800 (8.73%), the average being 263963.43 (8,32%), with $PmRand = 0.66$ and $PmVois = 0.33$ (best parameters of Figure 4-a).

The first a priori conclusion is that the computational cost of the evolutionary algorithm makes it useless in practical situations: an improvement of

between 10 and 15% requires a computational power of several order of magnitude larger. This quick conclusion must however be moderated: First, due to the quadratic dependency of the computational cost of the matrix inversion in term of the bandwidth, the actual gain in computing time is around 35% for a 15% bandwidth decrease. And second, many meshes used nowadays in industry require a few months of manpower to be built and validated. So 24 more hours of computation for a better numbering is relatively low increase in cost. And if the mesh is then put in an exploitation environment, and is used in several thousands of different Finite Element Analyses, then the overall gain might be in favor of getting a really better numbering, even at what a priori seems a high computational cost. But of course this means that meshes of up to a few thousands nodes can be handled by evolutionary algorithms.

It is nevertheless important to notice that the computation of the bandwidth can be greatly optimized. The present algorithm was designed to be very general, handling any possible operator. Hence it always computes the fitness from scratch. However, in the case where only a small number of transpositions are performed, the variation of the fitness could be computed, by examining only the neighbors of the transposed nodes.

5 Conclusion

We have presented feasibility results for the application of Evolutionary Computation to the problem of mesh numbering. Our best results outperform the state-of-the-art Gibbs method by 10 to 15% on the two test meshes used (with 1545 and 5453 nodes respectively). Whereas these sizes would appear fairly high for TSP problems for instance, they are still small figures with respect to real-world problems, where hundreds of thousands of nodes are frequent.

From the Evolutionary point of view, two issues should be highlighted. First, though both general-purpose and domain-specific crossover operators were tried, none proved efficient. A possible further trial could be to use more global geometrical information (e.g. divide the mesh into some connected components, and exchange the relative orders of such blocks, in the line of [11]).

Second, the overall best results were obtained by a $(1 + 7)$ -ES using pure random transposition mutation and starting from an initial population made of slightly perturbed Gibbs meshes. This which might be an indication that other heuristic local search methods (e.g. Tabu search) might be better suited to the MNP. However, as discussed in section 4, some hints make us believe that there is still a large room for improvement using evolutionary ideas: on the one hand, the problem-specific mutations proved useful for the $(7 + 50)$ -ES, indicating that we might not have make good usage of the domain knowledge; on the other hand, the $(7 + 50)$ -ES (with problem-specific mutation) outperformed the $(1 + 7)$ -ES when the initial population was not limited to modified Gibbs meshes: our hope is that starting from totally different parts of the search space could provide much better results in some particular situations ... which still remain to be

identified. But in those yet hypothetical cases, the relevance of the evolutionary approach for the MNP would be clear.

References

1. T. Bäck and M. Schütz. Evolution strategies for mixed-integer optimization of optical multilayer systems. In J. R. McDonnell, R. G. Reynolds, and D. B. Fogel, editors, *Proc. of the 4th Annual Conf. on Evolutionary Programming*. MIT Press, March 1995.
2. T. Bäck and M. Schütz. Intelligent mutation rate control in canonical GAs. In Z. W. Ras and M. Michalewicz, editors, *Foundation of Intelligent Systems 9th Intl Symposium, ISMIS '96*, pages 158–167. Springer Verlag, 1996.
3. P. G. Ciarlet. *Mathematical Elasticity, Vol I : Three-Dimensional Elasticity*. North-Holland, Amsterdam, 1978.
4. B. Freisleben and P. Merz. New genetic local search operators for the TSP. In H.-M. Voigt, W. Ebeling, I. Rechenberg, and H.-P. Schwefel, editors, *Proc. of the 4th Conf. on Parallel Problems Solving from Nature*, LNCS 1141, pages 890–899. Springer Verlag, 1996.
5. P.L. George. *Automatic mesh generation, application to Finite Element Methods*. Wiley & Sons, 1991.
6. M. George-Schleuter. Asparagos96 and the travelling salesman problem. In T. Bäck, Z. Michalewicz, and X. Yao, editors, *Proc. of the 4th IEEE Intl Conf. on Evolutionary Computation*, pages 171–174. IEEE Press, 1997.
7. F. Glover. Heuristics for integer programming using surrogate constraints. *Decision Sciences*, 8(1):156–166, 1977.
8. F. Glover and G. Kochenberger. Critical event tabu search for multidimensional knapsack problems. In *Proc. of the Intl Conf. on Metaheuristics for Optimization*, pages 113–133. Kluwer Publishing, 1995.
9. G.H. Golub and C. F. van Loan. *Matrix Computations*. John Hopkins University Press, 1996 - Third edition.
10. J. J. Grefenstette. Incorporating problem specific knowledge in genetic algorithms. In Davis L., editor, *Genetic Algorithms and Simulated Annealing*, pages 42–60. Morgan Kaufmann, 1987.
11. C. Kane and M. Schoenauer. Genetic operators for two-dimensional shape optimization. In J.-M. Alliot, E. Lutton, E. Ronald, M. Schoenauer, and D. Snyers, editors, *Artificial Evolution*, LNCS 1063. Springer Verlag, Septembre 1995.
12. P. Merz and B. Freisleben. Genetic local search for the TSP: New results. In T. Bäck, Z. Michalewicz, and X. Yao, editors, *Proc. of the 4th IEEE Intl Conf. on Evolutionary Computation*, pages 159–164. IEEE Press, 1997.
13. M. Peyral, A. Ducoulombier, C. Ravisé, M. Schoenauer, and M. Sebag. Mimetic evolution. In *Artificial Evolution'97*, Springer Verlag. To appear.
14. N. J. Radcliffe and P. D. Surry. Fitness variance of formae and performance prediction. In L. D. Whitley and M. D. Vose, editors, *Foundations of Genetic Algorithms 3*, pages 51–72. Morgan Kaufmann, 1995.
15. M. Sebag, M. Schoenauer, and C. Ravisé. Toward civilized evolution: Developping inhibitions. In Th. Bäck, editor, *Proc. of the 7th Intl Conf. on Genetic Algorithms*. Morgan Kaufmann, 1997.
16. F. Sourd. Renumerotation de maillages par algorithmes génétiques, June 1996. Stage d'option de l'Ecole Polytechnique.

17. D. Whitley, T. Starkweather, and D. Fuquay. Scheduling problems and travelling salesman: The genetic edge recombination operator. In J. D. Schaffer, editor, *Proc. of the 3rd Intl Conf. on Genetic Algorithms*. Morgan Kaufmann, 1989.
18. O. C. Zienkiewicz. *The Finite Element Method in Engineering Science*. McGraw-Hill, New-York, 1st edition, 1967, 3rd edition, 1977.

SPRINGER-VERLAG LONDON LIMITED CONTRIBUTOR'S PUBLISHING AGREEMENT



Parmee (ed.): Adaptive Computing in Design and Manufacture

It is our standard practice to ask authors of a contributed work to vest the world-wide copyright in Springer-Verlag for the full term of copyright. We would be grateful if you could confirm your acceptance for the publication of your work in **Parmee (ed.) / Adaptive Computing in Design and Manufacture** by signing and returning this agreement. We undertake not to withhold permission for any reasonable request from you to publish part of this work in connection with any other work by you, subject only to the usual acknowledgements regarding copyright and the original publication.

If excerpts from copyrighted works are included in your contribution, you should obtain written permission from their copyright owners, and in any event show credit for the sources in the work.

If it is appropriate, the author's employer may sign this agreement, and in any event the employer may reserve the right internally or for promotion purposes only by indicating it at the foot of this sheet.

If the author is a US government employee and this work was written in that capacity this agreement applies only to the extent allowable by US law.

If the work was prepared jointly, the author who signs this agreement confirms that all co-authors agree to the terms stated here, and have given authority for this agreement to be signed on their behalf.

The first-named author of each contribution will be entitled to receive one free copy of the above-named book.

ASSIGNMENT OF COPYRIGHT AND WARRANTY:

I, [name]

of [address].....

.....


confirm that I am the copyright owner of the work entitled:

.....

Subject to the qualifications above I assign to Springer-Verlag London Limited the copyright of the above work for publication in **Parmee (ed.): Adaptive Computing in Design and Manufacture**, warrant that the work is original (and has not been published before*), and contains no libellous or unlawful statements, and does not infringe the rights of others.

[signature] [dated]

(*delete the words in brackets if they do not apply)

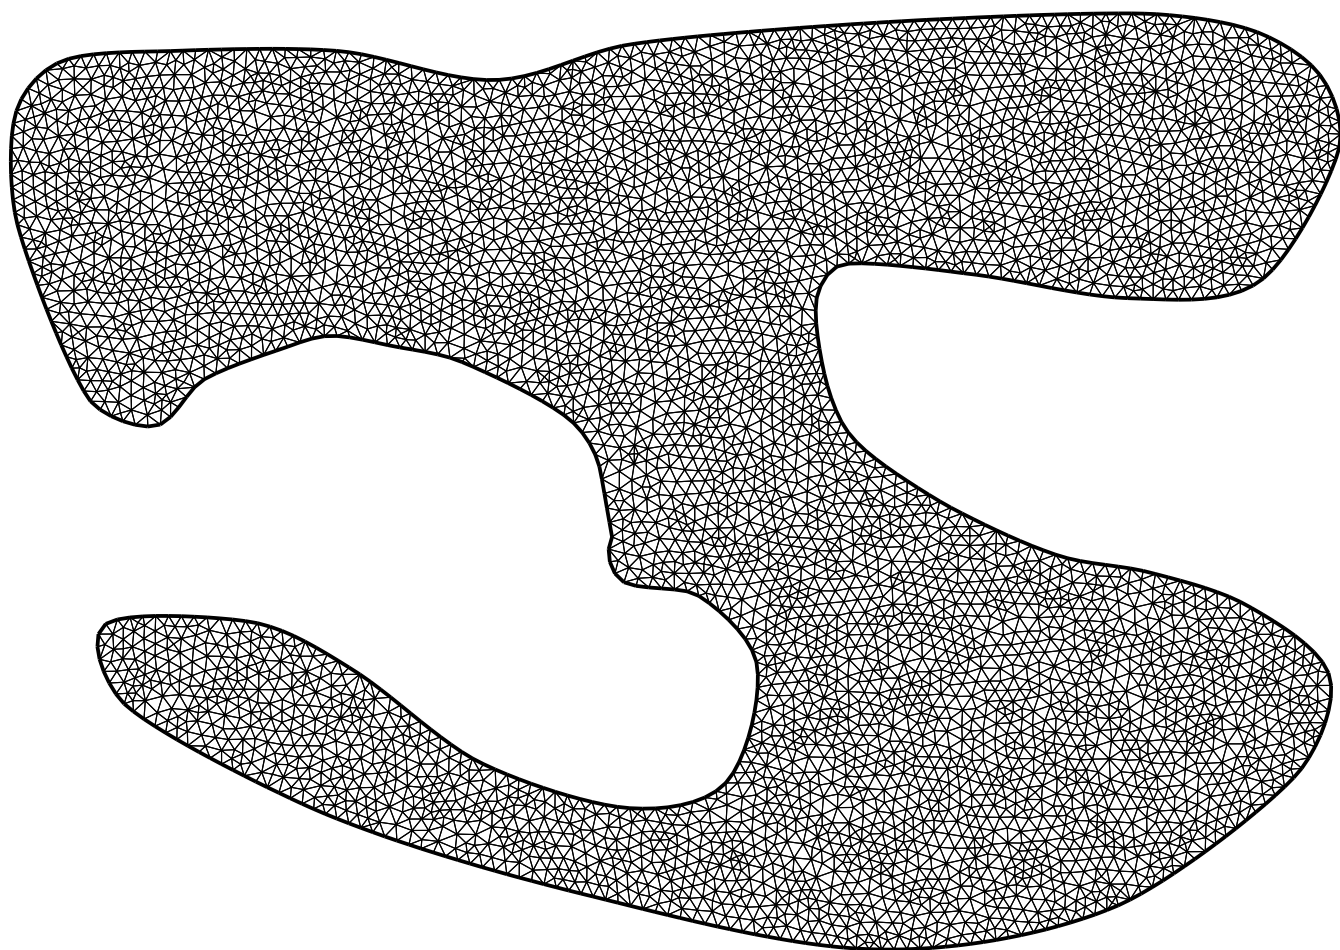



SPRINGER VERLAG - LAYOUT GUIDE

CAMERA-READY COPY

FORMATTING SPECIFICATIONS FOR AUTHORS

Only typescripts prepared according to these specifications can be accepted for publication. Typescripts submitted in an unsuitable format will be returned to the author for retyping/correction. The camera-ready copy (CRC) you submit will be reproduced directly by the offset process and does not include a copy-editing stage. It is, therefore, the responsibility of the author/editor to ensure that the CRC is as error-free as possible.

1. PAGES, TYPE SIZE, TYPE AREA, LINE SPACING

- CRC should be no longer than **10 pages**.
- Text and illustrations should fill, but not extend beyond, an area of 118 x 193 mm.
- Use a 10-point font size with line spacing of 2 pts
- The preferred type-face is Times Roman, except for computer programs for which a fixed character-width typeface should be used (eg Courier).
- Text should be justified on both left and right margins, not ragged.
- If page depth is too short, add space above and below subheadings.

Please keep a complete photocopy of your paper in case of accidents or production queries.

2. PAGE LAYOUT

Please refer to the attached example pages when producing your CRC. It is not necessary to follow the example pages exactly, but close adherence to this general style provides a consistent professional appearance to the volume.

3. PARAGRAPHS AND FOOTNOTES

Please set a style for these and follow it consistently throughout the paper.

4. SUBHEADINGS

Headings should be capitalised (ie all words except prepositions and conjunctions with less than five letters should have a capital initial) and should, with the exception of the title, be aligned to the left. The preferred font sizes are:

Title	-	16 pt bold (Centred)
2nd level	-	14pt bold
3rd level	-	12pt bold
<i>4th level</i>	-	<i>10pt italic</i>
5th level	-	10pt roman

NB Do not type a new heading on a page unless there is space for at least two lines of text as well. Insert extra space above other headings or round tables and illustrations in order to space out the page to a depth of 193 mm.

5. ILLUSTRATIONS

- **Line Drawings**
Ensure you supply a clear, well-drawn original - not a sketch or photocopy. Line drawings must be positioned on the CRC, centred on the type width. Labelling should not be set smaller than 8 pt.

- **Halftones**

Unless previously agreed with Springer halftone illustrations (black and white photos) should not be included in your CRC. In the event approval is given, please supply high-contrast glossy prints (unscreened). Write your name and the figure number on a label that you then stick on the back of each illustration, marking the top of the illustration with an arrow so it can be positioned correctly. Then leave the correct space on your CRC above the typed legend for it to be dropped in during production.

- **Captions**

Figures should be numbered by chapter, eg Figure 1.1, Figure 1.2, etc. The captions should be positioned underneath the illustration and separated from it by one blank line. Captions should be set slightly smaller than the main text (ie 9 pt)

The preferred style is to include figures within the body of the text.

6. **USE OF COPYRIGHT MATERIAL**

Permission must be sought from the copyright holder to reproduce previously published material. A standard form for this purpose is attached should it be required. Completed forms must be submitted with your CRC.

7. **REFERENCES**

Please consistently follow the reference style specified. References should be set slightly smaller than the main text (ie 9pt). Bear in mind the following general points:

- The information must be accurate - check references against source.
- The information must be sufficient to locate the reference.
- The text citations and the reference list must tally.

Text Citations

- Number references consecutively in the order in which they are first mentioned in the text. References cited only in a table or figure legend should be numbered as though they were cited in the first text cross-reference to the relevant table or figure.
- Identify references in the text, tables and figure legends by arabic numerals in square brackets (eg “.... as has been demonstrated recently [22].”).

Reference List

- List the references in numerical order.
- If the work has more than six authors list only the first three followed by “et al.”.
- The following styles are used for the main categories of references. Journal titles are abbreviated in accordance with BS 4148 (1970, 1975), which is compatible with ISO 833 and ANSI Z39.5 (1969). Examples are given below.

Journal Articles

1. Lysenko V, Maslov A A, 1984. The effect of cooling on supersonic boundary layer stability. *J Fluid Mech* 147:39-52.

Books

2. Fletcher N H, Rossing T D, 1991. *The Physics of Musical Instruments*. Springer-Verlag, New York.

Book in Series

3. Takahashi S, Takahara Y, 1995. *Logical Approach to Systems Theory*. Springer-Verlag, London (Lecture Notes in Control and Information Sciences No 204).

Book Chapters or Papers in Proceedings

4. Huang H C, Hinton E, 1986. Lagrangian and serendipity place and shell elements through thick and thin. In: Hughes T J R, Hinton E (eds), 1986. *Finite Element Methods for Plate and Shell Structures, Vol 1*. Pineridge Press, Swansea, pp 46-61.

Theses

5. Ben-Arieh D, 1985. Knowledge-based control system for automated production and assembly. PhD thesis, Purdue University.

8. **CHECKING, CORRECTING AND PRINTING**

Check a draft-quality print-out carefully - do not print the final version until you are certain there are no further corrections.

When printing the final CRC, please note the following:

- Check the text/figures/tables carefully for errors before printing in the final form.
- Print on one side only.
- The print on the final CRC should be black and well-defined. Do not use a bold typeface except to highlight certain words or terms. The output should not be “patchy” or have any broken fonts.
- Please use a high-resolution printer, preferably a laser printer with at least 300 dpi.


9. **DESPATCHING**

Place the 3 copies of the CRC between two pieces of strong cardboard, wrap it carefully and send it to the address below:

Conference Administrator (ACDM'98)
Plymouth Engineering Design Centre
University of Plymouth
Drake Circus
PLYMOUTH
Devon PL4 8AA
UK

Keep one complete photocopy of the manuscript in case of accidents or production queries.

LAYOUT FORMAT

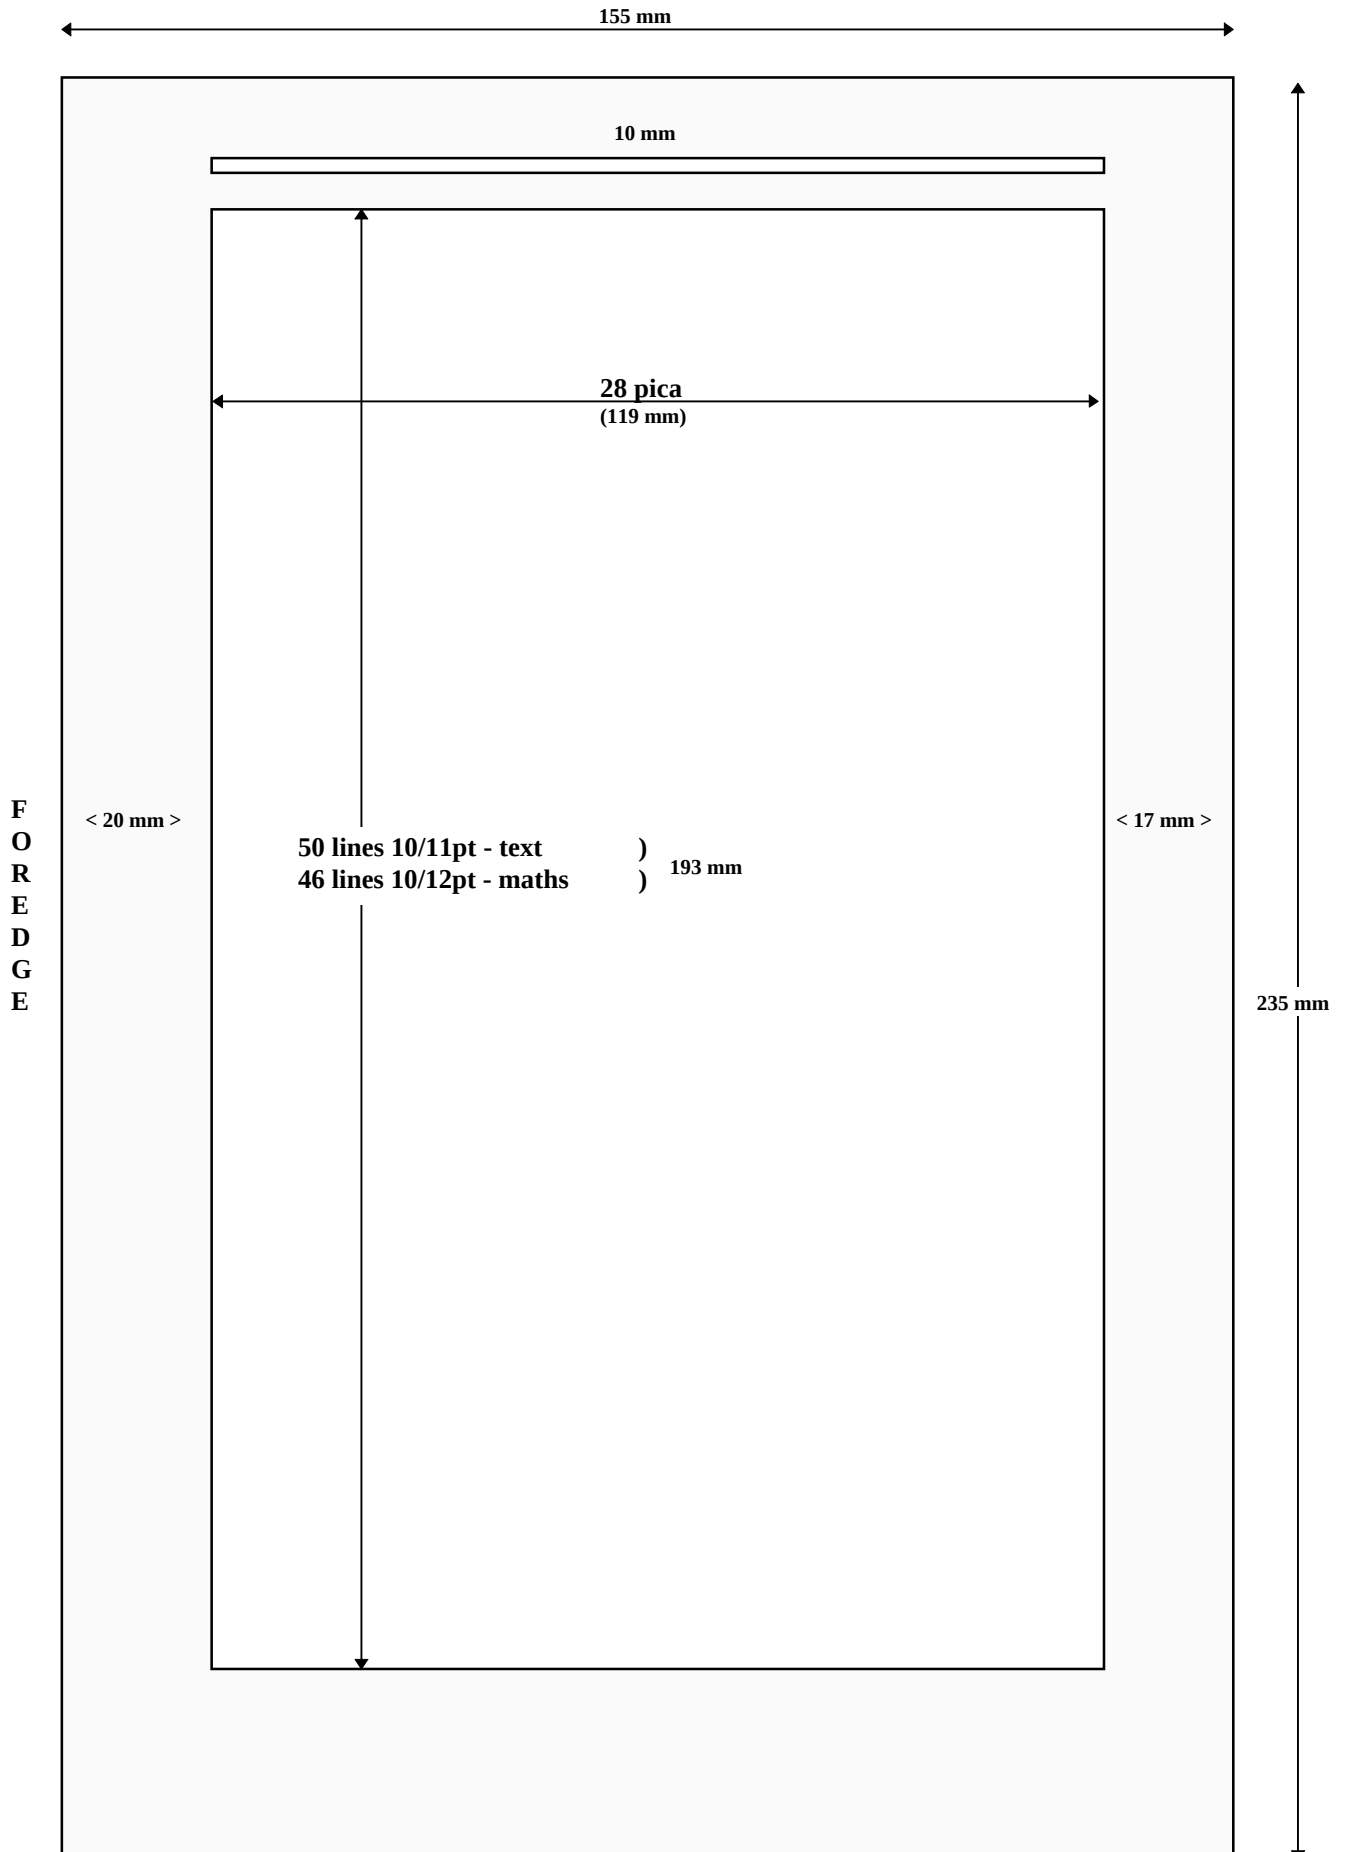



SAMPLE CRC PAGES

These are sample pages only. Final CRC pages must be submitted *printed on one side of the paper only and without any staples or other bindings*.

THE DEVELOPMENT OF A DUAL-AGENT STRATEGY FOR EFFICIENT SEARCH ACROSS WHOLE SYSTEM ENGINEERING DESIGN HIERARCHIES

I C Parmee

Plymouth Engineering Design Centre, University of Plymouth
email: iparmee@plymouth.ac.uk

Abstract. Evolutionary and adaptive search (AS) strategies for diverse multi-level search across a preliminary, whole-system design hierarchy defined by both discrete and continuous variable parameters is described. Such strategies provide high-level decision support when integrated with preliminary design software describing the major elements of an engineering system. Initial work has involved a Structured Genetic Algorithm (stGA) with appropriate mutation regimes to encourage search diversity. The shortcomings of the stGA approach are identified and a dual agent strategy is introduced (GAANT). Results are compared to those of the stGA. Appropriate communication between search agents concurrently manipulating the discrete and continuous variable parameter sets results in a more efficient search across the hierarchy than that achieved by the stGA whilst also simplifying the chromosomal representation. This simplification allows the further development of the preliminary design hierarchy in terms of complexity. The technique therefore represents a significant contribution to preliminary design where multi-level, mixed discrete/continuous parameter problems can be prevalent.

1. This is a 2nd level heading

The research is primarily concerned with the feasibility/bid stages of the design process. These early stages are characterised by a high degree of uncertainty related to limited available data and lack of definition in the initial design brief. A degree of necessary assumption is therefore required and a breadth-first approach is evident. The detail of any system modelling must be commensurate with the degree of confidence in the available data and it therefore follows that caution must be exercised when interpreting the results from such preliminary design tools. Engineering judgement based upon case-based reasoning, problem-specific knowledge and an understanding of the shortfalls of the software plays a significant role.

The hypothesis underlying the research described is that during these early stages of design the engineer requires a flexible tool that will provide an efficient

search of a high-dimensional design space rather than a stiff optimiser. The search will result in the identification of high-performance solutions from diverse regions of a design hierarchy described by both discrete design decisions and continuous variables. The genetic algorithm (GA) generation of a number of high-performance solutions based upon quantitative criteria provides sufficient information for the engineer to form a qualitative judgement. This benefits the significant requirement for caution related to problem uncertainties and allows conflicting criteria to be taken into consideration [1]. The selection of the most appropriate solutions results in a significant reduction in the size of the design space and subsequent concentration of further search in the most appropriate areas. The objective is not to locate the global optimum of the space described by the mathematical model but to select some local optima that best satisfies all qualitative criteria relating to the current design requirements. This will represent the optimal design direction at that stage in terms of least risk and best performance.

1.1. This is a 3rd level heading

The design domain comprises of a hierarchy describing the major design elements of a large-scale hydropower system (figure 1). At the current state of development the model of the hydropower system must be regarded as representative as opposed to definitive. To date work has been concentrated upon the recognition of those characteristics that enable the search process to concurrently investigate diverse regions of the design hierarchy. However, although not definitive, the model represents practical design aspects of most of the relevant major subsets of hydropower system design. The following variable parameters are considered:

1.1.1 This is a 4th level heading

Two distinct Modes of Operation are considered: Baseload supply where all of the available flow is constantly utilised for power generation and peak power supply where generation is restricted to those periods providing an increased unit price.

The incorporation of a Structured Genetic Algorithm (stGA) (2) provided an appropriate starting point for the development of a suitable global search paradigm [3]. The preliminary design model was therefore initially integrated with the stGA. The stGA allows parameters defining the characteristics of each site to be encoded in the same chromosome string. Controlling discrete parameters, relating to site, mode of operation and dam type then 'switch on' the relevant parameters within the chromosome string which relate to the appropriate configuration. The 'live' parameters are subsequently passed to the design model (see figure 2). Other values remain dormant within the string unless activated in a later population as a result of crossover or random mutation.



ADAPTIVE COMPUTING IN DESIGN AND MANUFACTURE '98

PEDC, Plymouth, UK: 21st-23rd April 1998

WWW Site: <http://www.tech.plym.ac.uk/soc/research/edc>

Please complete this form in block capitals and return it together
with remittance to:

Conference Administrator ACDM'98
Plymouth Engineering Design Centre
University of Plymouth
PLYMOUTH, Devon, PL4 8AA, UK

All enquiries should be made to:

Plymouth Engineering Design Centre
Tele: +44 (0)1752 233508/3509
Fax: +44 (0)1752 233529
Email: iparmee@plymouth.ac.uk

REGISTRATION FORM - PLEASE COMPLETE IN BLOCK CAPITALS

First Name(s) Surname

Profession/Title Name of Organisation (for name badge)

Address for Communications.....

..... Postcode/Zipcode.....

Telephone..... Telefax..... Email

Please indicate any special dietary requirements and or any physical disabilities.....

FEES AND CHARGES (incl VAT)			No OF PERSONS		CHARGE PER PERSON IN £s				£	p
Registration Fee					Before 20th Feb. '98		After 20th Feb. '98			
Per Delegate					285.00		325.00			
Conference Dinner ‡(Non-Residents)					28.50		28.50			
Conference Dinner ‡(Residents)					13.50		13.50			
ACCOMMODATION (DINNER, BED & BREAKFAST)	PRICES in £s (incl VAT)		NIGHTS REQUIRED				No OF ROOMS	£	p	
			MON	TUES	WED	THURS				
†WEST WING	Single	73.50								
	Double	140.00								
†WHITE HOUSE (Single only)	Single	46.50								
‡ Residents = those delegates staying in West Wing or White House			TOTAL REMITTANCE*							

‡ Residents = those delegates staying in West Wing or White House

†ACCOMMODATION

Delegates are advised to visit <http://www.adnet.co.uk/dartington/index.htm> for information on Dartington Hall Conference Centre and Accommodation. (Please note that only a limited number of rooms have been reserved.)

PAYMENT

Payment for registration is required in advance of the conference.

Please indicate below method of payment

*Cheque

☐

*International Money Order

☐

Please arrange for an invoice to be sent

☐

Invoice address if different than above:.....

.....
*(Cheques/Money Orders to be made payable to **PEP Research & Consultancy Ltd**)

CANCELLATIONS

In the event of cancellation, and provided that written notice is received seven days prior to the event, a refund of 75% of the registration fee will be made. If no notice of cancellation is received no refund can be made.

NB: ALL REGISTRATION FORMS MUST BE RETURNED TO THE PEDC CONFERENCE ADMINISTRATOR (ADDRESS ABOVE)



REGISTRATION FORM

ADAPTIVE COMPUTING IN DESIGN AND MANUFACTURE '98

21st-23rd April 1998
*Plymouth Engineering Design Centre,
University of Plymouth, Plymouth, UK*